

Fire Place

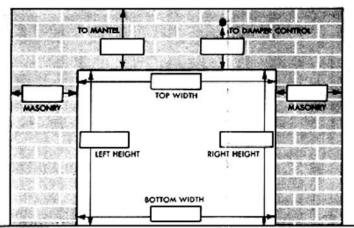

Please print exact measurement in rectangle between arrows. Measurements should be taken with steel tape and should be accurate within 1/16 inch. We make all allowances for overlap and clearance of hearth unless othewise specified.

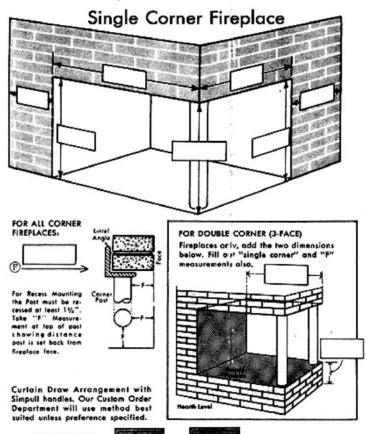


This form covers only the most common variations in fireplace construction.

If fireplace has UNUSUAL conditions, include separate diagram with measurements. OFTEN an actual PHOTOGRAPH will illustrate the special construction for our Custom Screen Department.



16165 SHADY GROVE ROAD, GAITHERSBURG, MD 20877 SALES@EASYFIRESUPPLY.COM 301.990.6195

Purchase Order No	Date
Mark Carton For Customer	
	this form for each order. Minor e made to suit special construction.
LINTEL BAR (steel angle supporting bricks)	©
	<u> </u>
CROSS SECTION NO TO	· •
PRESTACE	©
On recessed screens the curth hang one inch back from fact fireplace. The E dimension is show the drop to the floor fireplace at this point, if this a drop. Height of screen then be made long enough hang behind the hearth leve	e of s to of ere con Floor of Fireplace



Full __

(B) Arch

WIDT	Н	FULL	FLAT
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		more than	less than
0-36"	CH less sides =	6"	6"
36-40"	CH less sides =	8"	8"
40-44"	CH less sides =	9"	9"
44-48"	CH less sides =	10"	10"

If Arch, we must have pattern. Patterns must be on stiff paper, not tissue or newspapers. Pattern must indicate if sketch is looking into or out of fireplace and which is right and left side of fireplace. Be sure that the pattern and sketch matches.

Check One: ☐ Pattern made looking into fireplace
☐ Pattern made looking out from fireplace